


## Subwoofer Specifications

	10W3-D2		10W3-D4		10W3-D6	
Fs (free-air resonance):	28.8 Hz		29.7 Hz		30.8 Hz	
Qts (total speaker "Q"):	0.475		0.512		0.527	
Qes (electrical "Q"):	0.503		0.546		0.563	
Qms (mechanical "Q"):	8.260		8.260		8.260	
Vas (equivalent compliance):	1.66 ft <sup>3</sup>	46.9 liters	1.66 ft <sup>3</sup>	46.9 liters	1.66 ft <sup>3</sup>	46.9 liters
Xmax (linear excursion one-way):	0.549 in.	13.9 mm	0.579 in.	14.7 mm	0.513 in.	13.0 mm
Efficiency (1W/1m)*:	85.3 dB		85.3 dB		85.6 dB	
Sd (effective piston surface area):	53.5 in <sup>2</sup>	0.0345 m <sup>2</sup>	53.5 in <sup>2</sup>	0.0345 m <sup>2</sup>	53.5 in <sup>2</sup>	0.0345 m <sup>2</sup>
Re (DC resistance):	3.30 Ω (in series)		6.82 Ω (in series)		10.98 Ω (in series)	
Znom (nominal impedance):	Dual 2 Ω		Dual 4 Ω		Dual 6 Ω	
Pt (continuous thermal power handling):	250 Watts		250 Watts		250 Watts	


\*Efficiency (1W/1m) is not an accurate indicator of a subwoofer's output capability and should not be used as a comparison to other subwoofers to determine which one is "louder"!

## Physical Dimensions


Frame Diameter (A):	10.125 in.	257.17 mm	
Mounting Hole Diameter (B):	9.125 in.	231.77 mm	
Mounting Depth (C):	5.8125 in.	147.63 mm	
Overall Depth (D):	6.4375 in.	163.51 mm	
Magnet Diameter (E):	5.9375 in.	150.81 mm	
Displacement:	0.05 ft <sup>3</sup>	1.414 liters	

## Normal Recommended Enclosures (single driver)

Model	10W3-D2		10W3-D4		10W3-D6	
	Volume (Net Int.)	width X height X depth	Volume (Net Int.)	width X height X depth	Volume (Net Int.)	width X height X depth
Sealed Enclosure	0.625 ft <sup>3</sup>	18" x 11" x 9"	0.625 ft <sup>3</sup>	18" x 11" x 9"	0.75 ft <sup>3</sup>	18" x 11" x 10.5"
	17.7 l	457mm x 279mm x 229mm	17.7 l	457mm x 279mm x 229mm	21.2 l	457mm x 279mm x 267mm
Ported Enclosure	1.00 ft <sup>3</sup>	16" x 11" x 15.5"	1.125 ft <sup>3</sup>	16" x 11" x 17"	1.25 ft <sup>3</sup>	16" x 11" x 18.75"
	28.3 l	406mm x 279mm x 394mm	31.9 l	406mm x 279mm x 432mm	35.4 l	406mm x 279mm x 476mm
Port (inside dia. X length)		3" X 14.4" 76mm X 366mm		3" X 12.8" 76mm X 325mm		3" X 11.3" 76mm X 287mm




Sealed Enclosure

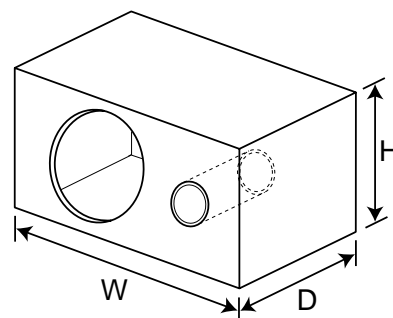


Ported Enclosure


- Enclosure dimensions listed are external dimensions which assume the use of 0.75 inch (19mm) thick material. If you are using 0.625 inch (16mm) thick material, subtract 0.25 inches (6.5mm) from each dimension. Do not use material with a thickness of less than 0.625 inches (16mm).
- Enclosure volumes listed are NET internal volumes. Driver displacement, port displacement and brace displacement must be added to obtain the final gross volume. The dimensions listed have already taken this into account.
- When using two subwoofers in a common enclosure simply double the required volumes and use two of the recommended ports (when needed). Likewise, when using three subwoofers in a common enclosure simply triple the required volume and number of ports (when needed).

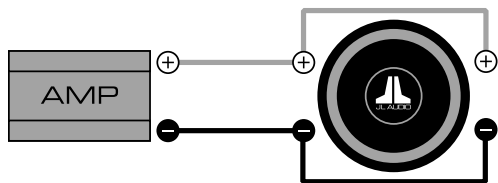


With coils wired in parallel, a dual 6Ω speaker will present a 3Ω load.  
 With coils wired in parallel, a dual 4Ω speaker will present a 2Ω load.  
 With coils wired in parallel, a dual 2Ω speaker will present a 1Ω load.

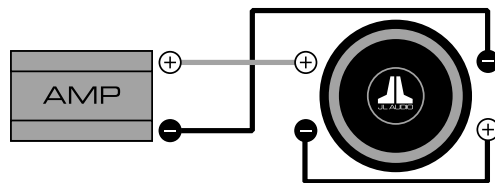


With coils wired in series, a dual 6Ω speaker will present a 12Ω load.  
 With coils wired in series, a dual 4Ω speaker will present a 8Ω load.  
 With coils wired in series, a dual 2Ω speaker will present a 4Ω load.

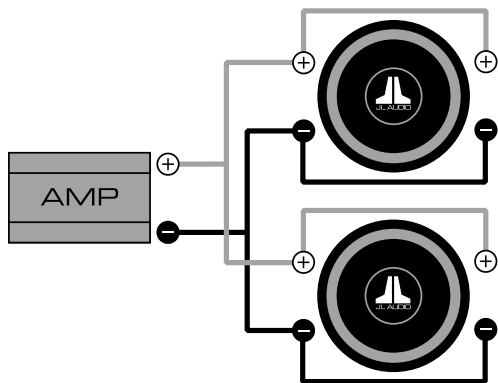


With coils AND speakers wired in parallel:  
 2 dual 6Ω speakers (D6) will present a 1.5Ω load.  
 With coils AND speakers wired in parallel:  
 2 dual 4Ω speakers (D4) will present a 1Ω load.  
 With coils AND speakers wired in parallel:  
 2 dual 2Ω speakers (D2) will present a 0.5Ω load.

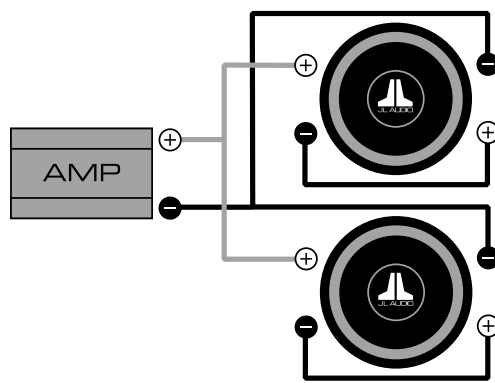

With the coils wired in series and the speakers wired in parallel:  
 2 dual 6Ω speakers (D6) will present a 6Ω load.  
 With the coils wired in series and the speakers wired in parallel:  
 2 dual 4Ω speakers (D4) will present a 4Ω load.  
 With the coils wired in series and the speakers wired in parallel:  
 2 dual 2Ω speakers (D2) will present a 2Ω load.

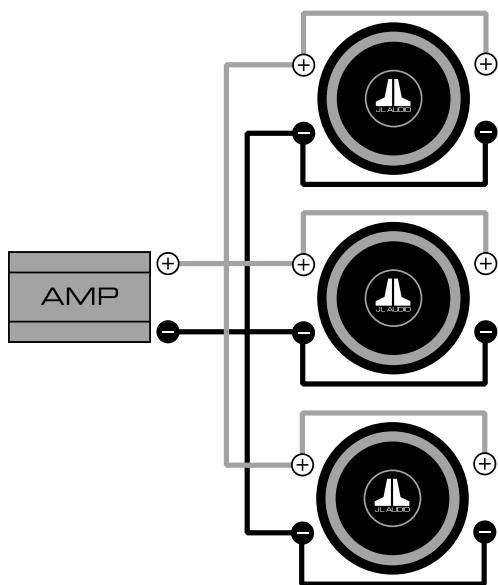

With coils AND speakers wired in parallel:  
 3 dual 6Ω speakers (D6) will present a 1Ω load.  
 With coils AND speakers wired in parallel:  
 3 dual 4Ω speakers (D4) will present a 0.7Ω load.  
 With coils AND speakers wired in parallel:  
 3 dual 2Ω speakers (D2) will present a 0.3Ω load.

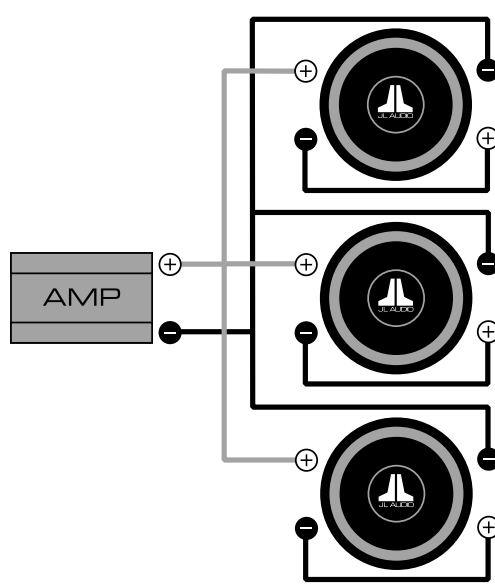

With the coils wired in series and the speakers wired in parallel:  
 3 dual 6Ω speakers (D6) will present a 4Ω load.  
 With the coils wired in series and the speakers wired in parallel:  
 3 dual 4Ω speakers (D4) will present a 2.7Ω load.  
 With the coils wired in series and the speakers wired in parallel:  
 3 dual 2Ω speakers (D2) will present a 1.3Ω load.

- Do NOT use different impedance speakers when using multiple subwoofers!
- JL Audio recommends using subwoofers as part of a bi-amplified system using high quality satellite speakers like our Evolution line of coaxial and component speakers. We do not recommend the use of passive crossover components (coils) on subwoofers. These components may adversely affect the performance of a subwoofer.
- When dealing with exceedingly long port lengths, we recommend the use of JL Audio's Flex-Port System. The Flex-Port tubing is flexible, allowing it to fit in otherwise tight locations. The Port mouths provide not only a convenient method of securing the port, but a smooth, rounded edge for the port termination as well.